

CALIFORNIA INSTITUTE OF TECHNOLOGY

Antenna Laboratory

Technical Report No. 23

CURRENT ON AN

INFINITELY LONG CYLINDRICAL ANTENNA

Hans H. Kuehl

This research was supported by the U.S. Air Force through the Air Force Office of Scientific Research of the Air Research and Development Command, under Contract Number AF18(600)-1113. Reproduction in whole or in part is permitted for any purpose of the United States Government.

Qualified requestors may obtain copies of this report from the ASTIA Document Service Center, Arlington Hall Station, Arlington 12, Virginia. Department of Defense contractors must establish ASTIA services or have their "need-to-know" certified by the cognizant military agency of their project or contract.

CURRENT ON AN INFINITELY LONG CYLINDRICAL ANTENNA

Hans H. Kuehl

ABSTRACT

The infinitely long circular cylindrical antenna driven at some cross section by a localized electromotive force, V , circumscribing the cylinder in a peripheral band is considered. The asymptotic expression for the current at large distances from the driving e.m.f. is derived using the saddle point method. It is shown that the amplitude of this current is proportional to the reciprocal of the logarithm of axial distance from the driving e.m.f.

The infinitely long cylindrical antenna considered here consists of a perfectly conducting circular cylinder excited by a localized belt of axially directed electric field at the surface of the cylinder. For mathematical simplicity this impressed electric field is taken to be a delta function. As shown in Figure 1, cylindrical coordinates are used and the impressed belt of electric field is localized in the plane $z=0$.

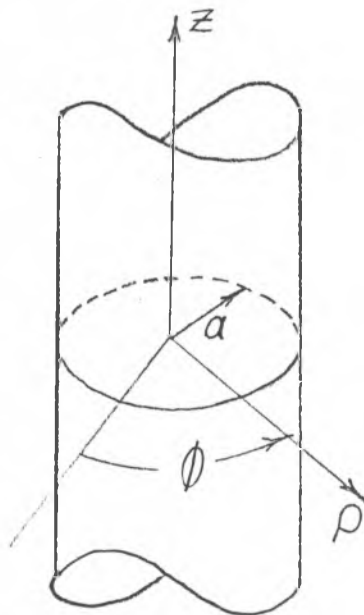


Figure 1.

The problem of determining the current distribution, input impedance and far field of the infinitely long cylindrical antenna has interested several investigators. In a paper by Papas¹, an expression for the asymptotic form of the current distribution for large z is derived. It is shown that the total current flowing in the z -direction is proportional

to $1/\ln(z/ka^2)$ for large z . His result is based on a saddle point integration of a certain contour integral representation of the field under the assumption $\rho \gg a$. However, as was pointed out by Schelkunoff², this procedure is not valid since, in order to obtain an expression for the current on the cylinder, the field must be evaluated at $\rho = a$ which contradicts the assumed condition $\rho \gg a$. Nevertheless it may be shown that, at least for small radii, the correct z -dependence of the current is identical to that derived by Papas and it is the purpose of this report to carry through a proof of this.

The current on an infinitely long antenna is given by³

$$I(z) = i\omega\epsilon_0 aV \int_{-\infty}^{\infty} \frac{H'_0(ka\sqrt{1-h^2})e^{ikzh}}{\sqrt{1-h^2} H_0(ka\sqrt{1-h^2})} dh \quad (1)$$

where a is the radius of the cylinder, k is the free-space wave number, V is the driving voltage. The value of this integral for large kz and small ka is of interest. For small arguments, the approximation

$$\frac{H'_0(ka\sqrt{1-h^2})}{H_0(ka\sqrt{1-h^2})} \approx \frac{1}{ka\sqrt{1-h^2} \ln(\frac{\gamma ka\sqrt{1-h^2}}{2})} \quad (2)$$

holds. Thus the integral in equation 1 can be divided into three regions to yield

$$\begin{aligned}
\frac{I(z)}{i\omega\epsilon_0 aV} = & \int_{-\infty}^{-M} \frac{H'_0(ka\sqrt{1-h^2}) e^{ikzh}}{\sqrt{1-h^2} H_0(ka\sqrt{1-h^2})} dh \\
& + \frac{1}{ka} \int_{-M}^M \frac{e^{ikzh}}{(1-h^2) \ln(\frac{\gamma ka \sqrt{1-h^2}}{2})} dh \\
& + \int_M^{\infty} \frac{H'_0(ka\sqrt{1-h^2}) e^{ikzh}}{\sqrt{1-h^2} H_0(ka\sqrt{1-h^2})} dh .
\end{aligned} \tag{3}$$

The number M is determined such that the approximation of equation 2 holds for $-M \leq h \leq M$. If this approximation holds for the magnitude of the argument less than a number N , M is given by $|ka\sqrt{1-M^2}| = N$, or since ka is very small, $kaM = N$, and therefore

$$M = N/ka . \tag{4}$$

The three integrals of equation 3 will now be evaluated for $kz \gg 1$ and $ka \ll 1$.

Let the second integral be denoted as I_2 . In order to evaluate I_2 the saddle point method will be used and because M is a large number, the limits will be replaced by $\pm \infty$. This is valid because the contribution to the integral in crossing the saddle point is not affected by this change in limits since the saddle point to be crossed is not near the end points, $\pm M$. Thus I_2 becomes

$$I_2 = \frac{1}{ka} \int_{-\infty}^{\infty} \frac{e^{ikzh}}{(1-h^2) \ln(\frac{\gamma ka \sqrt{1-h^2}}{2})} dh \tag{5}$$

where the contour of integration is shown in Figure 2.

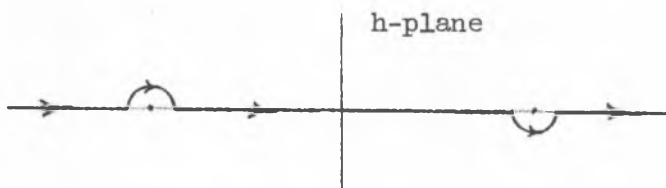


Figure 2.

The transformation $h = \sin \tau$ is now made and equation 5 becomes

$$I_2 = \frac{1}{ka} \int_{-\frac{\pi}{2} + i\infty}^{\frac{\pi}{2} - i\infty} \frac{e^{ikz \sin \tau}}{\cos \tau \ln\left(\frac{\gamma ka \cos \tau}{2}\right)} d\tau \quad (6)$$

where the path of integration in the τ -plane is shown in Figure 3.

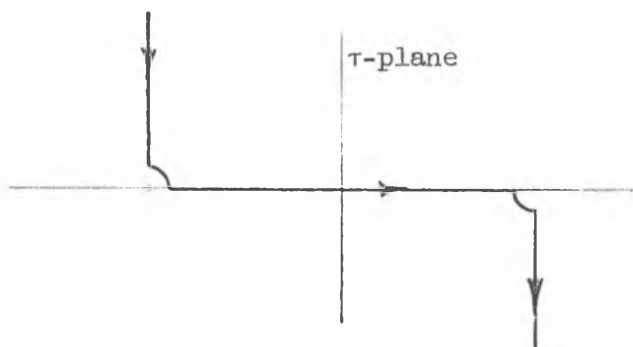


Figure 3.

In order to apply the saddle point method, equation 6 is rewritten in the following form:

$$I_2 = \frac{1}{ka} \int_{-\frac{\pi}{2} + i\infty}^{\frac{\pi}{2} - i\infty} \frac{e^{kz \left[-\frac{1}{kz} \ln(\cos \tau) + i \sin \tau \right]}}{\ln\left(\frac{\gamma ka \cos \tau}{2}\right)} d\tau \quad (7)$$

Letting $f(\tau) = -\frac{1}{kz} \ln(\cos \tau) + i \sin \tau$, the saddle points are clearly determined by the relation

$$f'(\tau_0) = \frac{1}{kz} \frac{\sin \tau_0}{\cos \tau_0} + i \cos \tau_0 = 0 \quad (8)$$

Solving for the saddle points, one obtains

$$\sin \tau_0 = \frac{1}{2i kz} \pm \sqrt{-\frac{1}{4k^2 z^2} + 1} \approx \frac{1}{2ikz} \pm 1 \quad (9)$$

Since kz is assumed to be large, saddle points occur near $\tau = \pm \pi/2$.

Near $\pi/2$, $\sin \tau \approx 1 - \frac{1}{2}(\tau - \frac{\pi}{2})^2$ and consequently one obtains

$$\tau_0 \approx \frac{\pi}{2} \pm \sqrt{i/kz} \quad (10)$$

Similarly near $-\pi/2$, $\sin \tau \approx -1 + \frac{1}{2}(\tau + \frac{\pi}{2})^2$, and one obtains

$$\tau_0 \approx -\frac{\pi}{2} \pm \sqrt{1/ikz} \quad (11)$$

Thus there are four saddle points and it is necessary to investigate $f(\tau)$ more closely to choose a correct path of integration. The nature of $\text{Re}[f(\tau)]$ is shown in Figure 4. The correct path is the broken line and the saddle point at $\tau_0 = \pi/2 - \sqrt{i/kz}$, which is the only one that contributes, is crossed at an angle of $-\pi/4$. From the saddle point method and using $f''(\tau_0) = -2i$ one obtains

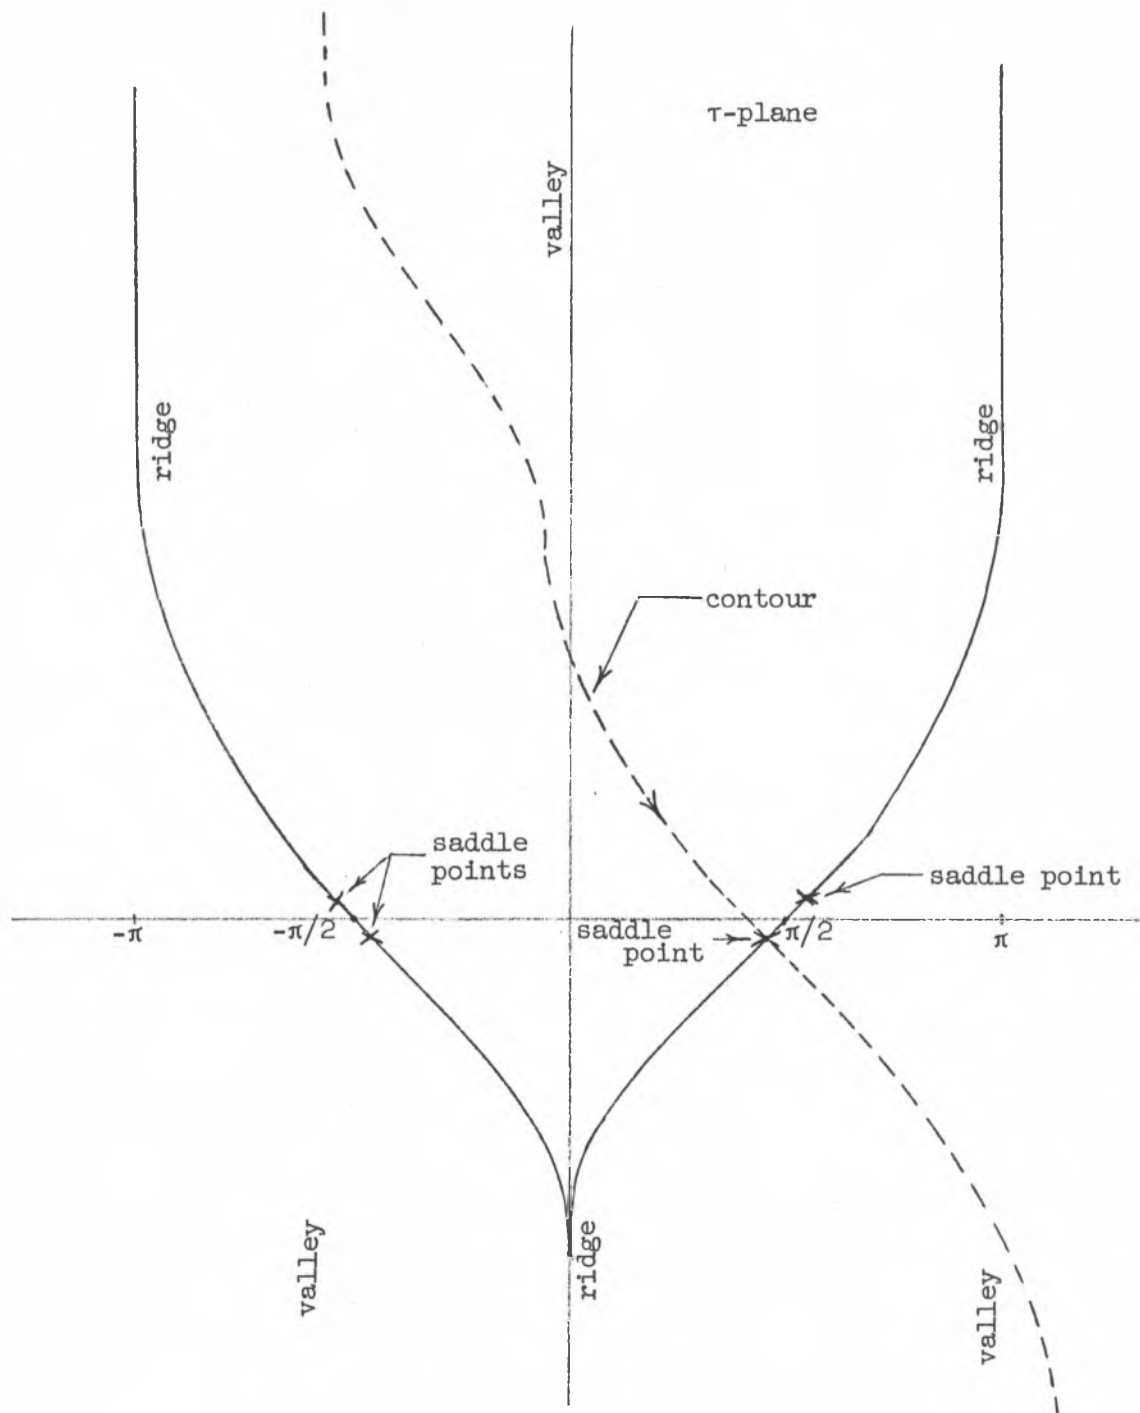


Figure 4.

$$\begin{aligned}
I_2 &\approx \frac{1}{ka} \frac{e^{kz[-\frac{1}{kz} \ln \sqrt{1/kz} + i]}}{\ln(\frac{\gamma ka}{2} \sqrt{\frac{1}{kz}})} \sqrt{\frac{2\pi e}{kz e^{i\pi(-2i)}}} \\
&\approx \frac{2\sqrt{\pi} e^{ikz}}{ika \ln(z/ka^2)} \quad (12)
\end{aligned}$$

Let the first and third integrals of equation 3 be denoted by I_1 and I_3 respectively. It will now be shown that I_1 and I_3 are negligible compared to I_2 . From equation 3, I_1 may be written

$$I_1 = - \int_{-\infty}^{-M} \frac{K'_0(ka\sqrt{h^2-1}) e^{ikzh}}{\sqrt{h^2-1} K_0(ka\sqrt{h^2-1})} dh \quad (13)$$

where $K_0(x)$ is a modified Bessel function of the second kind. Since M is very large, unity can be neglected with respect to h^2 in the region of integration and equation 13 becomes

$$I_1 = - \int_{\infty}^M \frac{K'_0(kah) e^{-ikzh}}{h K_0(kah)} dh = \int_M^{\infty} \frac{K'_0(kah) e^{-ikzh}}{h K_0(kah)} dh \quad (14)$$

Let $kah = x$ to obtain

$$I_1 = \int_N^{\infty} \frac{K'_0(x) e^{-i(\frac{kz}{ka})x}}{x K_0(x)} dx \quad (15)$$

Since kz/ka is large, this integral may be expanded in a power series in ka/kz by repeatedly integrating by parts, so that I_1 becomes

$$I_1 = \frac{K'_0(N) e^{-i(\frac{kz}{ka})N}}{N K_0(N)} \left(\frac{ka}{kz}\right) - \frac{d}{dN} \left[\frac{K'_0(N)}{N K_0(N)} \right] e^{-i(\frac{kz}{ka})N} \left(\frac{ka}{kz}\right)^2 + \dots \quad (16)$$

Retaining only the largest term I_1 is given to first order by

$$I_1 \approx \frac{K'_0(N) e^{-i(\frac{kz}{ka})N}}{N K_0(N)} \left(\frac{ka}{kz}\right) \quad (17)$$

Thus by comparison with equation 12, it is seen that I_1 becomes negligible with respect to I_2 for large kz and small ka . A similar argument holds for the third integral of equation 3 so that the only contribution is due to I_2 and the current for large kz and small ka is

$$I(z) = \frac{v e^{ikz} re'}{60 \sqrt{\pi} \ln(z/ka^2)} \quad . \quad (18)$$

REFERENCES

1. Papas, C. H. "On the Infinitely Long Cylindrical Antenna", Jour. Appl. Phys. 20 (1949), 437-440.
2. Private communication with C. H. Papas, April 1959.
3. Schelkunoff, S. A., Proc. IRE 33 (1945), 877.

DISTRIBUTION OF REPORTS

AF18(600)-1113

Commander, ATTN: SRY AF Office of Scientific Res. Washington 25, D. C.	3	Chief, Physics Branch Division of Research U.S. Atomic Energy Commission Washington 25, D. C.	1
Commander, ATTN: SRLT AF Office of Scientific Res. Washington 25, D. C.	2	U.S. Atomic Energy Commission Tech. Information Extension P.O. Box 62 Oak Ridge, Tennessee	1
Commander, ATTN: WCOSI Wright Air Development Center Wright-Patterson A.F. Base Ohio	4	Natl. Bureau of Standards Library, Room 203, NW Bldg. Washington 25, D. C.	1
Commander, ATTN: CROT AF Cambridge Research Center L.G. Hanscom Field Bedford, Massachusetts	1	Physics Program National Science Foundation Washington 25, D. C.	1
Commander, ATTN: RCSSLD Rome Air Development Center Griffiss A.F. Base Rome, New York	1	Director, Office of Ordnance Res. Box CM, Duke Station Durham, North Carolina	1
Commander, European Office Air Research and Dev. Command The Shell Building 47 rue Cantersteen Brussels, Belgium	2	Director, Dept. of Commerce Office of Technical Services Washington 25, D. C.	1
P.O. Box AA Wright-Patterson A.F. Base Ohio	1	ARO, Inc. ATTN: AEOI Tullahoma, Tennessee	1
Armed Services Tech. Inf. Agency ATTN: TIPDR Arlington Hall Station Arlington 12, Virginia	10	Commander, Air Proving Ground ATTN: ACOT Eglin A.F. Base, Florida	1
Director of Res. and Dev. Headquarters, USAF ATTN: AFDRD Washington 25, D. C.	1	Commander A.F. Flight Test Center ATTN: FTOTL Edwards A.F. Base, California	1
Office of Naval Research Department of the Navy ATTN: Code 420 Washington 25, D. C.	1	Commander ATTN: ORDXR-OTL Army Rocket and Guided Missile Ag. Redstone Arsenal, Alabama	1
Director, Naval Research Lab. ATTN: Technical Inf. Officer Washington 25, D. C.	1	Commander AF Special Weapons Center ATTN: SWOI Kirtland A.F. Base, New Mexico	1
Director, Army Research Office Research and Development Department of the Army Washington 25, D. C.	1	Commander AF Missile Development Center ATTN: HDOI Holloman A.F. Base, New Mexico	1

Commandant, ATTN: MCLI A.F. Institute of Technology Wright-Patterson A.F. Base, Ohio	1	Director, Res. Lab. for Electronics Massachusetts Inst. of Tech. Cambridge 39, Massachusetts	1
Commander, ATTN: WDSOT AF Ballistic Missile Division AF Unit Post Office Los Angeles 45, California	1	Dean F. E. Terman Electronics Research Laboratory Stanford University Stanford, California	1
Commander Air Res. and Dev. Command Andrews AF Base, Washington 25, D. C. ATTN: RDR 1 copy RDRR 1 copy RDSFI-1 2 cc	4	Professor E. Weber Microwave Research Laboratory Polytechnic Inst. of Brooklyn Brooklyn, New York	1
Commanding General U.S. Army Signal Corps Research and Development Lab. ATTN: SIGFM/EL-RPO Ft. Monmouth, New Jersey	1	Head G.E. Microwave Laboratory 601 California Avenue Palo Alto, California	1
National Aeronautics and Space Administration Washington 25, D. C.	6	Professor T. E. Tice Dept. of Electrical Engineering Ohio State University Columbus 10, Ohio	1
Advanced Research Projects Ag. Washington 25, D. C.	1	Dr. R. W. P. King Harvard University Cambridge, Massachusetts	1
Rand Corporation 1701 Main Street Santa Monica, California	1	General Electric Company Missile and Ordnance Systems 3198 Chestnut Street Philadelphia 4, Pennsylvania ATTN: Library Manager	1
Director, AUL 9663 Air University Library Maxwell A.F. Base, Alabama	1	Professor John Hoffman Dept. of Electrical Engineering University of Illinois Champaign, Illinois	1
Chairman (DRB/DSIS) Canadian Joint Staff 2450 Massachusetts Ave, NW Washington 25, D. C.	1	Professor W. G. Shepherd Dept. of Electrical Engineering University of Minnesota Minneapolis, Minnesota	1
Applied Mechanics Review Southwest Research Institute 8500 Culebra Road San Antonio 6, Texas	1	Technical Library Research and Dev. Labs. Hughes Aircraft Company Culver City, California	1
Inst. of the Aeronautical Sc. 2 East 64th Street New York 16, New York ATTN: Librarian	1	Dr. R. E. Hutter, Chief Eng. Sylvania Elec. Products Inc. P. O. Box 997 Mountain View, California	1
Exchange and Gift Division Library of Congress Washington 25, D. C.	1	Professor P. Kusch Radiation Laboratory Columbia University New York, New York	1
Remington Rand Univac Div. of Sperry Rand Corp. 19th St. and W. Allegheny Ave. Philadelphia 29, Pennsylvania	1		

Dr. Donald E. Kerr John Hopkins University Department of Physics Baltimore 18, Maryland	1	University of California Electronics Research Laboratory Berkeley 4, California Attn: J. Whinnery	1
Dr. D. W. Healy Electrical Engineering Dept. Syracuse University Res. Inst. Syracuse 10, New York	1	Office of Naval Research 346 Broadway New York 12, New York Attn: I. Rowe	1
U. of Southern California Electrical Engineering Dept. Los Angeles 7, California Attn: Z. Kaprielian	1	National Aeronautics and Space Administration 1520 H Street, N.W. Washington 25, D. C. Attn: B. Mulcahy	1
Stanford University Microwave Research Laboratory Stanford, California Attn: M. Chodorow	1	Brooklyn Polytechnic Institute Microwave Research Institute 55 Johnson Street Brooklyn 1, New York Attn: N. Marcuvitz	1
University of Minnesota Electrical Engineering Dept. Minneapolis 14, Minnesota Attn: H. Oskam	1	Dr. Glenn H. Keitel Advanced Programs Section Philco Corporation 3875 Fabian Way Palo Alto, California	1
Northeastern University Physics Department Boston, Massachusetts Attn: G. Lanza	1		
University of New Hampshire Department of Physics Durham, New Hampshire Attn: L. Mower	1		
Rutgers University Microwave Laboratory New Brunswick, New Jersey Attn: M. Sirkis	1		
New York University Inst. of Mathematical Sciences 25 Waverly Place New York 3, New York Attn: M. Kline	1		
Oxford University Oxford, England Attn: H. Motz	1		
University of Illinois Dept. of Electrical Engineering Urbana, Illinois Attn: P. Coleman	1		
Stevens Inst. of Technology Physics Department Hoboken, New Jersey Attn: W. Bostick	1		